



Features

- Aluminum alloy IP 67 compliant enclosure
- Intel® Atom™ Z510 1.1GHz, optional for Z530 1.6GHz
- -20~60 °C wide operation temperature
- Standalone with wall-mount kit support
- DC 11~32V wide-range power input




Specifications

System	
Processor	Intel® Atom™ Z510 1.1GHz CPU default Z530 1.6GHz CPU for option
System Chipset	Intel® US15W
Outside I/O ports	All of connector are IP 67 rating <ul style="list-style-type: none"> • 1 x LAN port • 1 x COM port (COM1) • 1 x VGA port • 1 x USB port • 1 x DC 11-32V
System Memory	1GB DDR2 400 MHz on board
Storage	1 x 2.5" SATA HDD 1 x CF slot on board
Power Input	DC 11~32V
LED Indicator	1 x Power status
Expansion Slots	1 x Mini PCIe slot
OS Support	Windows® XP Pro, XP Embedded

Mechanical	
Construction	Aluminum die casting chassis (Top cover : Heatsink design)
Color	Black
Mounting	Wall mount
Dimension	223(W)x147(H)x62(D)mm
Net Weight	2.2 kgs

Dimension

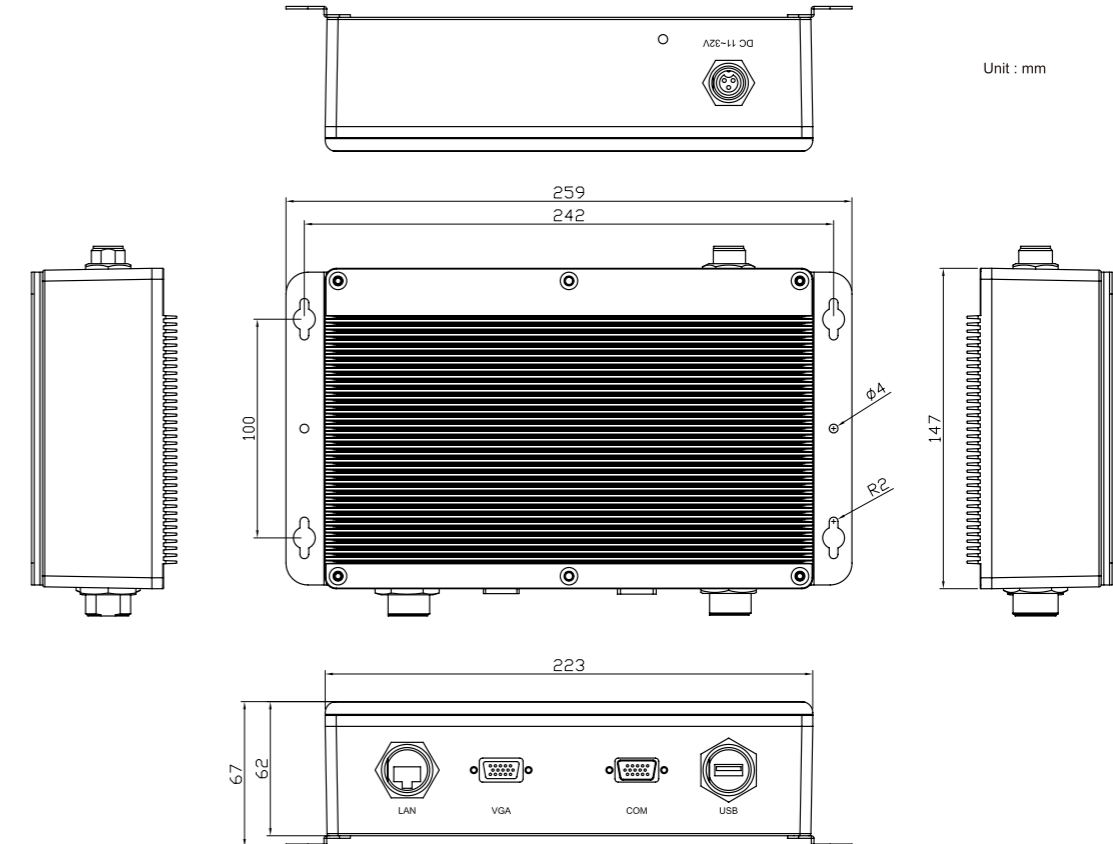

Environmental	
Operating Temperature	-20~60 °C
Storage Temperature	-30~70 °C
Storage Humidity	10~95% @40 °C non-condensing
Certificate	CE / FCC Class A

Ordering Information	
ACS-2701A	IP 67 water-proof embedded controller
APW-4206 (option)	IP 67 water-proof 60W power adapter