



### Features

- 21.5" TFT-LCD with full HD resolution of 1920x1080
- Sheet metal enclosure
- NEMA 4 / IP 65 compliant front bezel
- Front OSD
- VESA 100x100 Mount
- Anti-Reflection glass in front for protection (Optional touch panel)
- Default AC 100-240V input, Optional for DC 11~32V
- Default: VGA input, Optional for DVI, Video and S-Video input

### Specifications

#### LCD

Display Type	21.5" color TFT-LCD
Max. Resolution	1920x1080
Max. Colors	16.7M
Luminance (cd/m <sup>2</sup> )	400
Contrast Ratio	1000 : 1
Viewing Angle	H:170° / V:160°
Backlight Lifetime	40,000hrs

#### System

Input Signal	RGB
On Screen Display Control	On the front side
External I/O Port	<ul style="list-style-type: none"> <li>• 1 x VGA input</li> <li>• 1 x AC power input</li> <li>• Optional: DVI, Video, S-Video, touch (RS-232 or USB), 3 Pin terminal block for DC11~32V input</li> </ul>

#### Power Supply

Power Input	AC 100~240V, optional DC 11~32V
-------------	---------------------------------


#### Touch Screen

Type	Analog resistive (optional)
Light Transmission	80%

#### Mechanical

Construction	Steel enclosure
IP Rating	Front panel IP65
Mounting	Panel / VESA 100x100 Mount
Dimension	557(W)x362(H)x68(D)mm

### Dimension

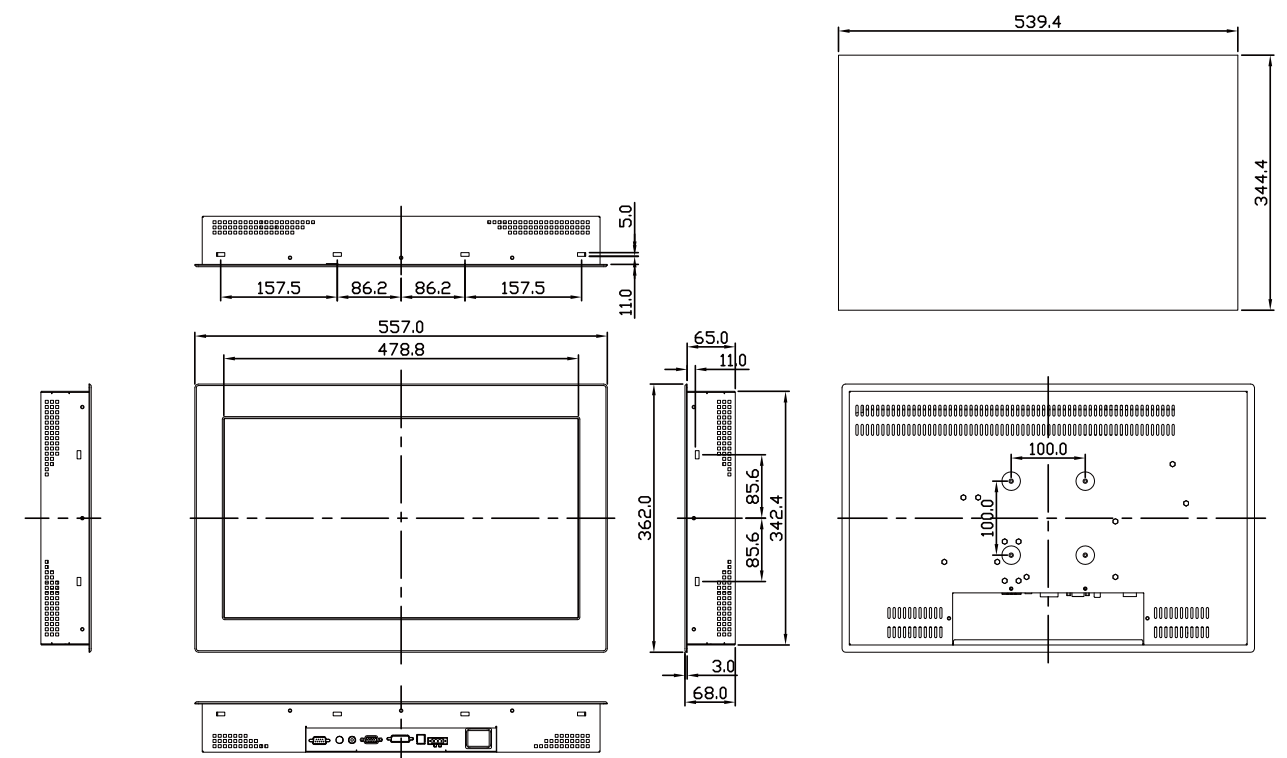

#### Environmental

Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	Meet CE/FCC Class A