



Features

- Performance Intel Dual Core Fan-less Design
- Overlay Resistive Touch
- Supports DDR3 Memory
- All Solid Capacitor Motherboard
- LED Backlight LCD Panel

System

Processor	Intel Atom D525 1.8 GHz
System Memory	1 x 204 Pin SO-DIMM socket, supports DDR3 800 Mhz, up to 2 GB
System Chipset	Intel ICH8M
External I/O Port	<ul style="list-style-type: none"> • 4 x USB ports • 2 x RJ-45 ports (GbE) • 1 x DB-15 VGA • 1 x DB-9 RS-232 COM1 • 1 x DB-9 RS-422/485 COM3 (default:RS-485) • 1 x 2 Pin terminal block connector
Solid Storage Disk	<ul style="list-style-type: none"> • 1 x 2.5" SATA HDD • 1 x CF Slot
Expansion Slots	None
OS Support	Windows CE 6.0, XP Pro, XP Embedded, Windows Embedded Standard 7

LCD

Display Type	8" TFT-LCD
Max. Resolution	800x600
Max. Color	262K
Luminance (cd/m ²)	350
View Angle	H:130° / V:110°
Backlight Lifetime	50,000hrs


Touch Screen

Type	Overlay Resistive Touch
Light Transmission	80%

Power Supply

Power Input	DC 12V/DC 11~32V(option)
-------------	--------------------------

Dimension

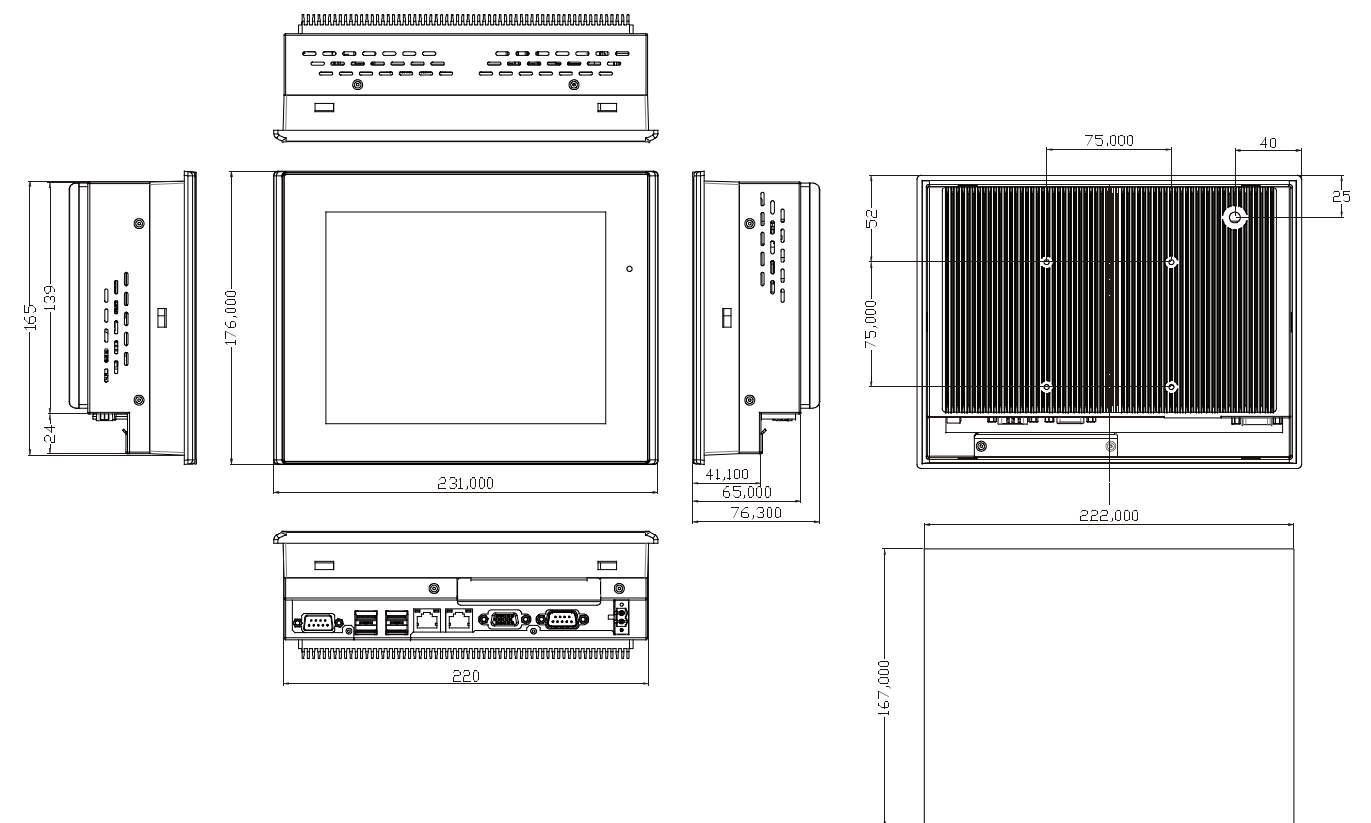

Mechanical

Construction	Plastic molding front panel and metal housing
Color	Black
IP Rating	Front Panel IP65
Mounting	Panel/VESA 75x75 Mount
Dimension	231(W)x176(H)x76.3(D) mm
Net Weight	3.5 kgs

Environmental

Operating Temperature	0~50 °C
Storage Temperature	-30~60 °C
Storage Humidity	10~90% @40 °C, non-condensing
Certificate	CE/FCC Class A

Ordering Information

AHM-6086A 8" SVGA 800 x 600 fanless HMI with Atom D525 1.8G CPU,2GB DDR3 800MHz memory, overlay resistive touch screen , 12VDC input with adaptor, plastic front/Steel back