



Features

- Fanless
- Intel Atom N270 1.6GHz processor, FSB 533 MHz
- NEMA 4/ IP 65 compliant front panel
- Sealed resistive touch screen
- One 200 Pin SO-DIMM socket, up to 2GB DDR2 533 MHz SDRAM
- DC 11~32V wide-range power input



Specifications


System	
Processor	Intel Atom N270 1.6 GHz built-in, FSB 533 MHz
System Memory	1 x 200 Pin SO-DIMM socket, support up to 2 GB DDR2 SDRAM 533 MHz, default 1GB
System Chipset	Intel 945GSE + ICH7M
External I/O Port	<ul style="list-style-type: none"> • 4 x USB ports • 2 x RJ-45 ports (GbE) • 1 x DB-9 RS232 (COM 1) • 2 x DB-9 (COM2/COM3) RS232, COM2 (RS232/422/485 selection, default RS232), COM3 (RS232) • 1 x VGA port • 1 x MIC, 1x LINE-Out, LINE-in • 1 x 3 Pin DC Power input
Storage	<ul style="list-style-type: none"> • 1 x 2.5" SATA HDD • 1 x external CF slot
Expansion Slots	None
OS Support	WinCE 5.0, Windows XP, XP Professional, XP embedded

LCD	
Display Type	15" TFT-LCD
Max. Resolution	1024 x 768
Max. Color	262K
Luminance (cd/m ²)	400
View Angle	H:140° / V:125°
Backlight Lifetime	50,000hrs

Touch Screen	
Type	Analog resistive
Light Transmission	80%

Power Supply	
Power Input	DC 11~32V

Dimension

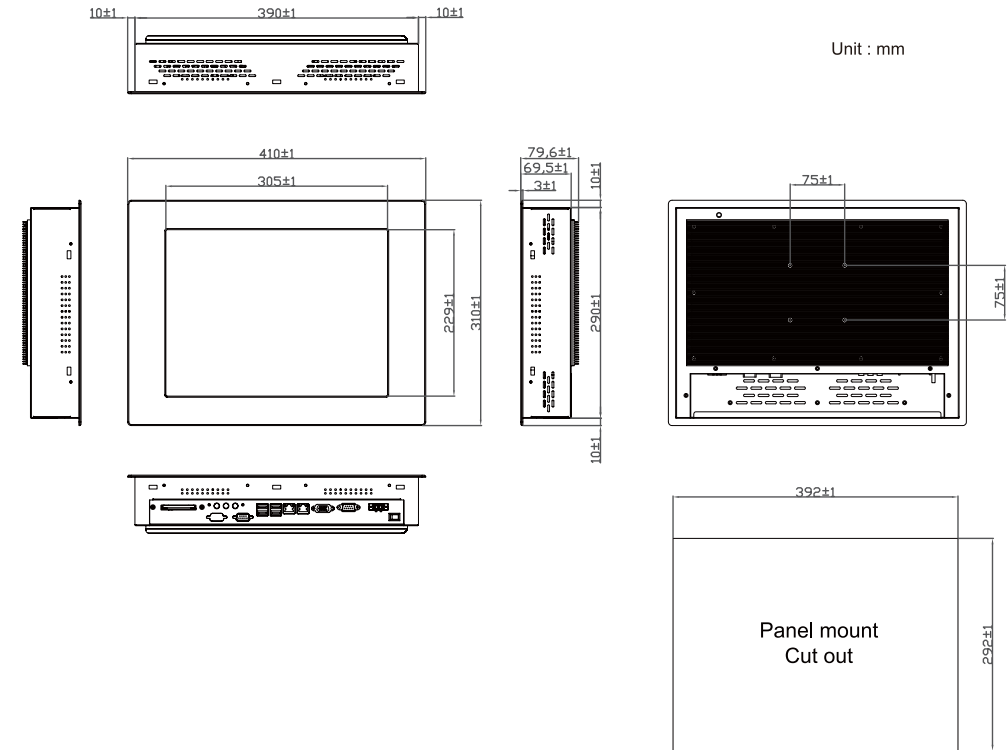

Mechanical	
Construction	Heavy-duty steel chassis
Color	Black
IP Rating	Front Panel IP 65
Mounting	Panel / VESA 75x75 Mount
Dimension	410(W)X310(H)X80(D)mm
New Weight	8.5kgs

Environmental	
Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	CE/FCC Class A