Industrial Display Monitor

Open Frame Type

19" SXGA Open Frame Display Monitor

OPD-1190

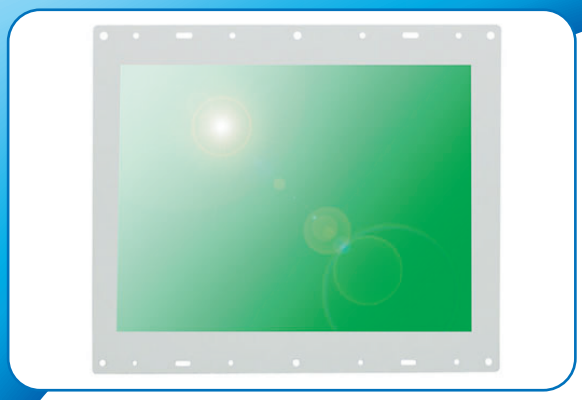

Display Specifications

Display	19" Color Active TFT Flat Panel Display
Luminance	250 cd/m^2
Viewing Angle	140 / 140 (H/V)
Resolutions	1280 x 1024 (native mode), 262K colors
Backlight Lifetime	50,000 hrs
Touch Screen	Antiglare resistive (optional)
OSD Controls/Indicators	Automatic Screen, Setup (OSD), Brightness, Contrast, Horizontal/Vertical Position, Image Lock, Color Balance, Video Information, Power On and Sync
Power Input	AC 100~240V

Mechanical Specifications

Construction	Steel chassis & front panel
Dimensions	484(W) x 400(H) x 70.3(D)mm

Environment Specifications

Operating Temperature	0~50°C (32~122°F)
Storage Temperature	-20~60°C (-4~140°F)
Relative Humidity	10~90% @40 C Non-condensing, without touch screen
Vibration	1G peak, 5~500 Hz (Random)
Shock	15G peak acceleration (11 msec. duration)
Certification	CE and FCC class A
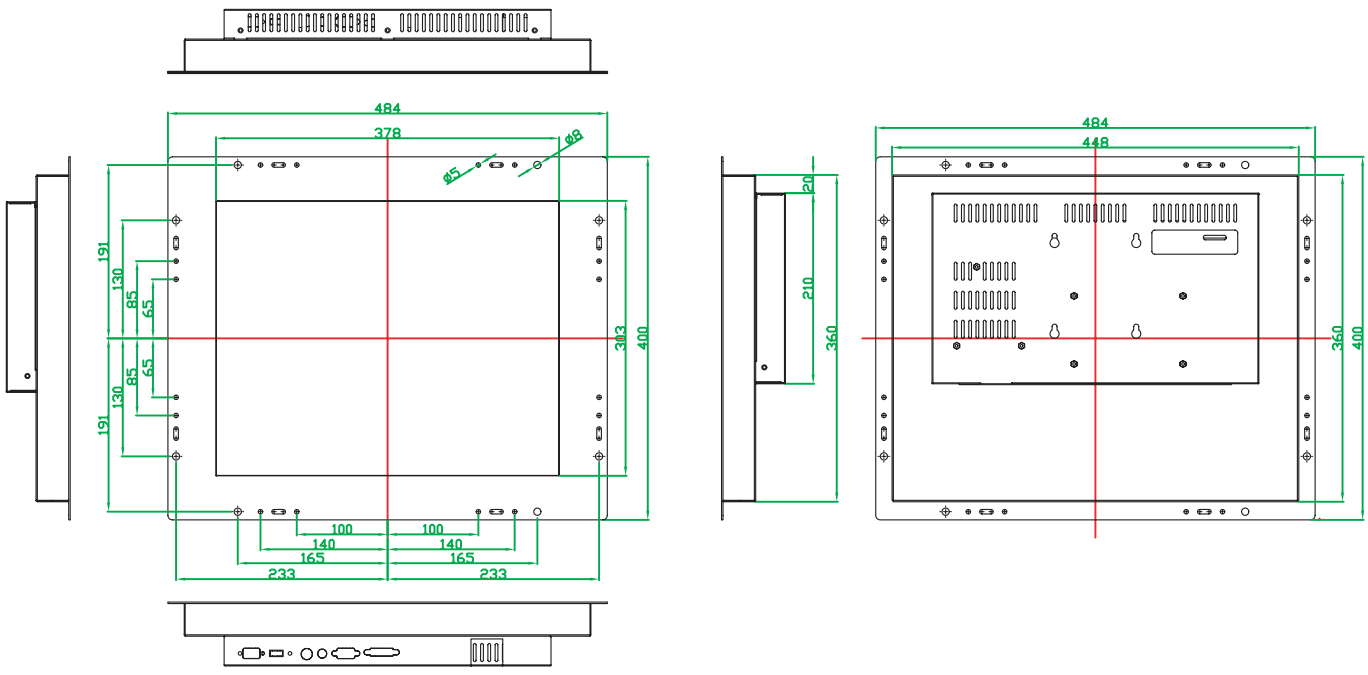
Dimensions